


The Silver Service team are dedicated to providing responsive, fast and effective service. Our clients depend on us to have their shop fronts and entries opening for business and closing for security.

DYNAVENT® by DYNAMIC CLOSURES

SIDE FOLDING PERFORATED ALUMINIUM CONCERTINA DOOR

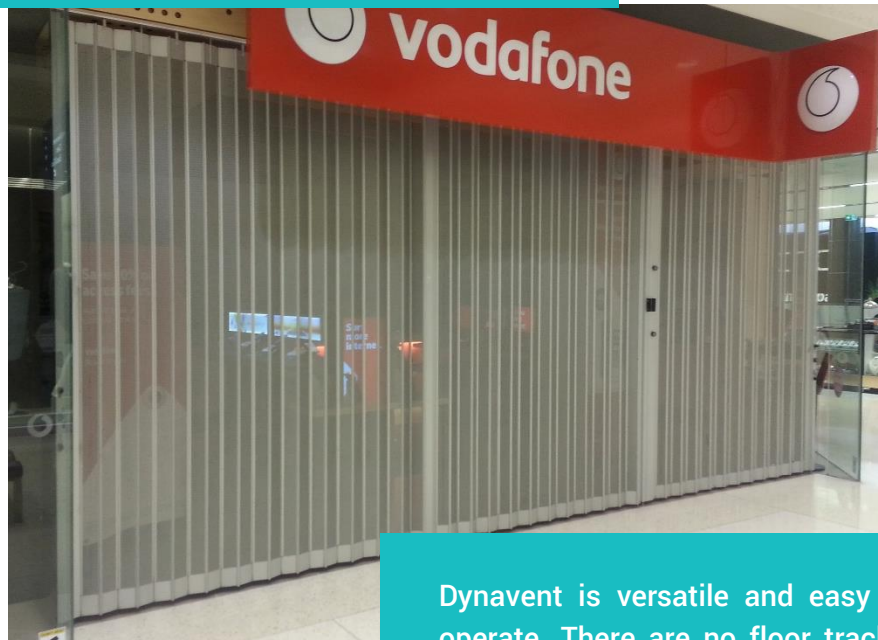

Dynavent® (side folding perforated door) is part of Dynamic Closures' DYNAGLIDE® range. Dynavent has been specially crafted for ease of operation and reliable security, an ideal solution for various applications including:

- **Commercial shop fronts**
- **Shopping centres**
- **Shop windows**
- **Retail outlets**
- **Serveries**
- **Counters**
- **Bars & restaurants**
- **Hotel kitchens**
- **Kiosks**
- **Cafés**

Dynavent is versatile and easy to operate. There are no floor tracks, removable mullions, or the need for complicated bulkheads. The design provides flexibility and can be operated without the need of costly motorisation.

Dynavent offers a **quality and economical solution**. Purpose built with a **robust perforated aluminium** panel curtain construction and equipped with a **premium locking and tracking system**. Dynavent also accommodates radius openings, allowing it to stack away into a **300mm wide storage pocket**.

SPECIFICATIONS

CURTAIN

Dynavent perforated aluminium panel design shall incorporate **104mm O/A (w) x 101mm (h)** truss-like aluminium panels top and bottom of curtain. Curtain shall be **94mm (w)** with a 51% visibility perforated aluminium infill. Maximum height **4600mm**.

CURTAIN EDGES

Shall be **32mm x 53mm** extruded vertical members (hinges), with top and bottom automatically retractable locking post. One intermediate member shall be provided for every **3000mm** of opening. All intermediate members shall be fitted with adjustable, concealed drop bolts. Intermediate member spacing on counter applications **1800mm** maximum.

COLOURS

The standard finish for all visible aluminium components on Dynavent closures is a **clear anodised matt finish**. Optional extra powder coating in Dulux colour range is available.

CURTAIN WEIGHT

Curtain weight is **11 kg** per square metre. This may vary depending on locking post types and amounts.

LOCKING

Lead posts shall be provided with cylinder locks and guards, operable from both sides. Master keyed cylinders (if required), shall be supplied by others. Top and bottom shoot bolt locking as standard. Dust proof floor sockets shall be provided. Electro-magnetic locking is available as an optional addition.

HEAD TRACK

The track extruded aluminium **38mm (h) x 36mm (w)**. Curved tracks (where required) are supplied with a standard radius.

STANDARD RADIUS:

45 degree - 407mm and 559mm

90 degree - 407mm and 559mm

To provide smooth and easy operation for **custom** curved applications, the radius must be nominated (minimum **1500mm**). For elliptical curves, a template must be provided to Silver Service Club prior to manufacture.

DYNAVIEW 100MM CONCERTINA DOOR



OPTIONAL EXTRAS:
Egress Doors for
emergency exits.
Tapered openings.

SMOOTH SAILING WITH SILVER SERVICE

As part of our commitment to providing superior service, we ensure that our clients will be smooth sailing with the Silver Service crew. **An After Hours Emergency number, 0401 333 776**, is offered to connect you directly to one of our technicians or sales staff to assist you anytime, anywhere.

Silver Service Club is continually researching and developing products and reserves the right to change specifications without notice.



ADDRESS: 25A/1-3 ENDEAVOUR ROAD
CARINGBAH NSW 2229
PHONE: 02 9531 8542
AFTER HOURS: 0401 333 776
EMAIL: service@silverserviceclub.com.au